


Cutting tools

SUPERCUT XPK/XPS

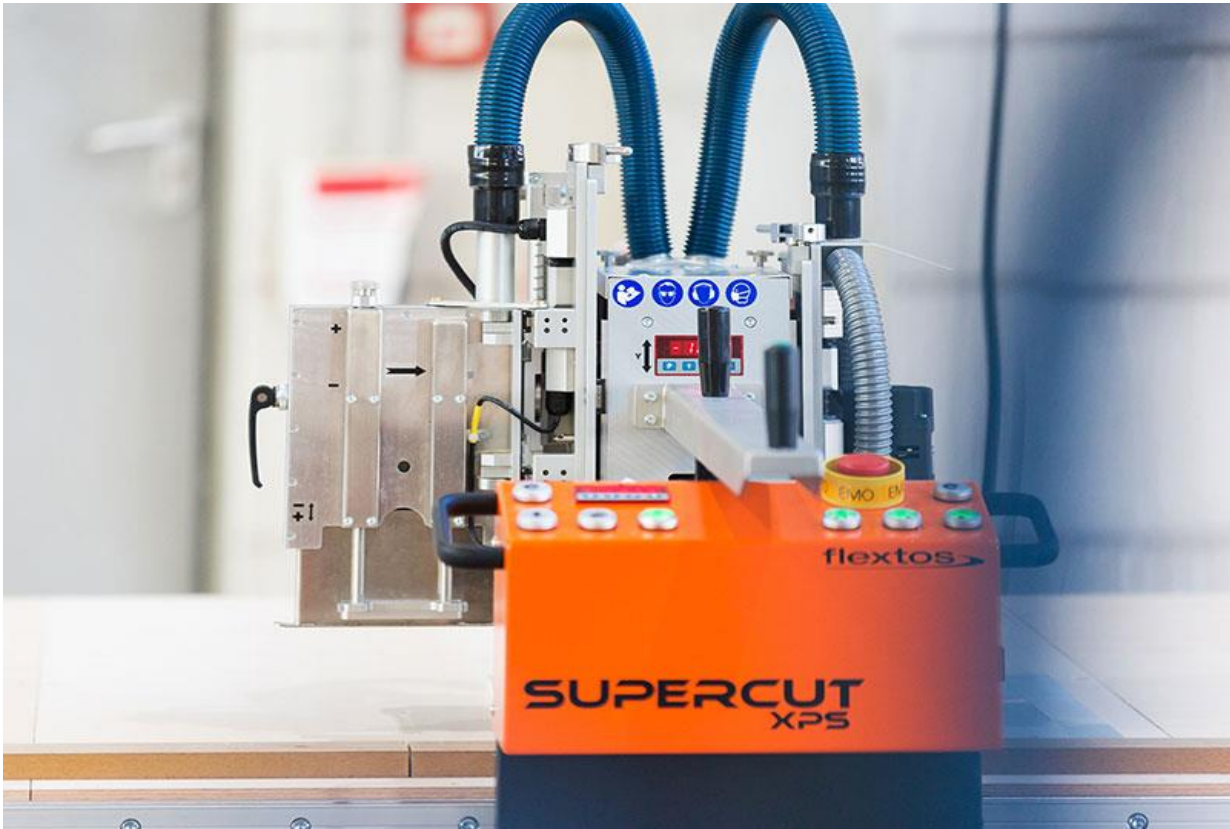

flextos GmbH | Rosenheimer Straße 44 | 83064 Raubling | Germany

Phone +49 (8031) 233 88 60 | Fax +49 (8031) 233 88 68 | info@flextos.com | www.flextos.com

Managing Director: Stefan Velkoski

Registration Office: Traunstein | HRB: HRB 264 15 | USt-IdNr./VAT No: DE 314200950

TPEF.00.00.0083 profile cutter D3 S8 T12.5
profile cutter; cutting depth up to 12.5 mm; cutting diameter 3 mm; shaft 8 mm



WPCM.00.00.0004 profile cutter D6 S8 T12.5
profile cutter; cutting depth up to 12.5 mm; cutting diameter 6 mm; shaft 8 mm



WPCM.00.00.0002 profile cutter D6 S8 T16
profile cutter; cutting depth up to 16 mm; cutting diameter 6 mm; shaft 8 mm



WPCM.00.00.0003 profile cutter D6 S8 T25
profile cutter; cutting depth up to 25 mm; cutting diameter 6 mm; shaft 8 mm



WPWE.00.00.0038 groove cutter D8 S8 T20
Groove cutter for grooving in plasterboard and other board materials; groove width 8 mm; shank 8 mm; max. groove depth 20 mm



TPEF.00.00.0093 groove cutter D18 S8 T19
groove cutter for curtain rail grooving; groove width 18 mm; shaft 8 mm; max. groove depth 19 mm



WSVG.00.00.0005 v-groove cutter 45° S8 T17
v-groove cutter for 45° angles; cutting depth up to 17 mm; shaft 8 mm



WSVG.00.00.0014 special v-groove cutter 45°(i) S8 T11
special v-groove cutter for 45° interior corners/angles; cutting depth up to 11 mm; shaft 8 mm



WPWE.00.00.0021 special v-groove cutter 45°(i) S8 T16
special v-groove cutter for 45° interior corners/angles; cutting depth up to 16 mm; for inside edges; shaft 8 mm



WSVG.00.00.0003 v-groove cutter 60° S8 T17

v-groove cutter for 60° angles; cutting depth up to 17 mm; shaft 8 mm



WPWE.00.00.0001 v-groove cutter for reinforced edges

v-groove cutter for reinforced, rounded 90° edges/angles; radius 2 mm; shaft 8 mm



WSVG.00.00.0004 v-groove cutter 90° S12 T25

v-groove cutter for 90° angles; cutting depth up to 25 mm; shaft 12 mm; not suitable for XPM



WSVG.00.00.0009 v-groove cutter 90° S8 T18.5

v-groove cutter for 90° angles; cutting depth up to 18.5 mm; special cut 90.2°; shaft 8 mm



WPWE.00.00.0017 v-groove cutter DIA 90° S8 T15

v-groove cutter DIA; for 90° angles; cutting depth up to 15 mm; diamond-tipped; shaft 8 mm



WPWE.00.00.0022 special v-groove cutter 90°(i) S8 T11

special v-groove cutter for 90° interior corners/angles; cutting depth up to 11 mm; shaft 8 mm



WPWE.00.00.0023 special v-groove cutter 90°(i) S8 T16

special v-groove cutter for 90° interior corners/angles; cutting depth up to 16 mm; shaft 8 mm




WSVG.00.00.0012 v-groove cutter 120° S12 T18

v-groove cutter for 120° angles; cutting depth up to 18 mm; shaft 12 mm; not for suitable XPM



TPEF.00.00.0081 flute milling cutter D25 S8

flute milling cutter; \varnothing 25 mm; shaft 8 mm



WPWE.00.00.0005 flute milling cutter D20 S8

flute milling cutter; \varnothing 20 mm; shaft 8 mm



WSSB.00.24.0165 saw blade, Standard 165mm

saw blade, Standard XPS/XP; \varnothing 165 mm; 24 teeth; 165 x 1.5/1.0 x 20 mm



WSSB.01.30.0180 saw blade, standard 180mm

saw blade, \varnothing 180 mm; 30 teeth; 180 x 2.8/1.8 x 20 mm
for SUPERCUT XPM Standard and 2.3kW saw unit SUPERCUT XPS + CNC



WSSB.00.48.0160 saw blade, WIDIA

saw blade, WIDIA; \varnothing 160 mm; 48 teeth; 160 x 1.8/1.2 x 20 mm; for aluminum or composite material



WSSB.00.10.0165 saw blade, DIA

saw blade, DIA; \varnothing 160 mm; 10 teeth; 165 x 2.4/1.8 x 20 mm; for cement panels/boards



WSSB.00.28.0120 saw blade for 7-blade unit

Saw blade, \varnothing 120 mm; 10 teeth; 120 x 1.5/1.0 x 20 mm; for 7-blade saw (single blade)

